



PERMALEUM MONTE

NO WAX

Standard vinyl sheet flooring with real cloud design, all colors of this sheet have been newly updated



Thickness 2.0mm

Price (material price)	3,300 JPY/m ² 6,006 JPY/m
Material Classification	Multilayer Sheet Vinyl Flooring FS
Dimensions	2.0mm (thickness) × 1,820mm (width) × 9m (length)
Packing	9m/roll
Weight	53.8kg/roll

Build-to-Order Thickness 2.5mm

Dimensions	2.5mm (thickness) × 1,820mm (width) × 9m (length)
Minimum Order Quantity	100m per color
Production lead time	Three weeks
Price	3,600 JPY/m ² (material price)
	6,552 JPY/m (material price)
Packing	9m/roll
Weight	64.2kg/roll




Installation Method	Subfloor	Adhesive
Basic Installation	Cement Mortar Concrete	Cement FK
Water resistant Installation		Cement U/ Cement EP20

Notes

- Please weld the seams together with designated welding rod.
- Please connect both ends of the sheets together when performing connecting work.
- Adhesive for water resistant installation is recommended in case it is assumed to carry heavy things on the floor.
- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Normal flooring wax will diminish antibacterial performance. Please use an Antibacterial type wax.

Sheet Size/Cross Section



PH-5067

1



PH-4067

6



PH-4227

2




PH-4327

7



PH-8577

3




PH-8327

8



PH-8527

4



PH-8657

9



PH-4077

5



PH-8937

10



PH-4317


11



PH-8177

12

PH-4227

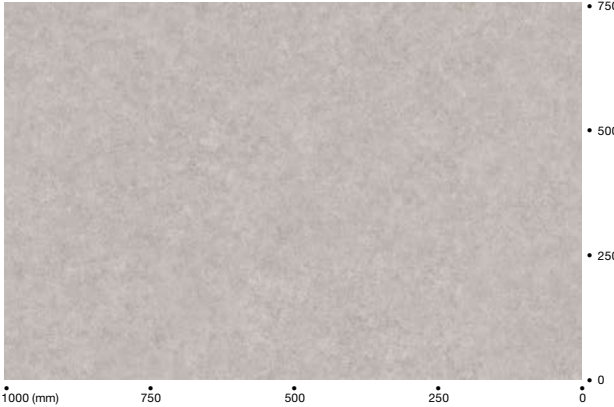

• 750 (mm)

• 500

• 250

1000 (mm) 750 500 250 0

Product Color Numbers

PH-4067	6	4337	16	5067	1	8217	21	8657	9
4077	5	4347	14	8037	15	8287	17	8937	10
4227	2	4357	18	8177	12	8327	8		
4317	11	4367	20	8187	13	8527	4		
4327	7	4377	22	8197	19	8577	3		



PH-8187

13



PH-4337

16



PH-8197

19




PH-8217

21



PH-4347

14



PH-8287

17



PH-4367

20



PH-4377

22



PH-8037

15



PH-4357

18



PH-5067

PERMALEUM FILARE

NO WAX

Standard vinyl sheet flooring with realistic textile pattern, all colors of this sheet have been newly updated

floor
score

TC0308167
JIS A 5705

JIS

TC0308167
JIS A 5705

MADE WITH RECYCLED VINYL

Factory-based Recycling

Low VOCs

No Wax

Antibacterial

Heavy Foot Traffic

Thickness 2.0mm

Price (material price)	3,300 JPY/m ² 6,006 JPY/m
Material Classification	Multilayer Sheet Vinyl Flooring FS
Dimensions	2.0mm (thickness) × 1,820mm (width) × 9m (length)
Packing	9m/roll
Weight	53.8kg/roll

Build-to-Order

Thickness 2.5mm

Dimensions	2.5mm (thickness) × 1,820mm (width) × 9m (length)
Minimum Order Quantity	100m per color
Production lead time	Three weeks
Price	3,600 JPY/m ² (material price)
	6,552 JPY/m (material price)
Packing	9m/roll
Weight	64.2kg/roll











Installation Method	Subfloor	Adhesive
Basic Installation	Cement Mortar Concrete	Cement FK
Water resistant Installation		Cement U/ Cement EP20

Notes

- Please weld the seams together with designated welding rod.
- Please connect both ends of the sheets together when performing connecting work.
- Adhesive for water resistant installation is recommended in case it is assumed to carry heavy things on the floor.
- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Normal flooring wax will diminish antibacterial performance. Please use an Antibacterial type wax.

Sheet Size/Cross Section

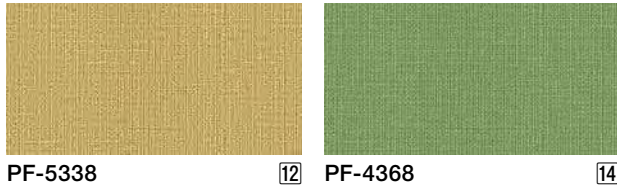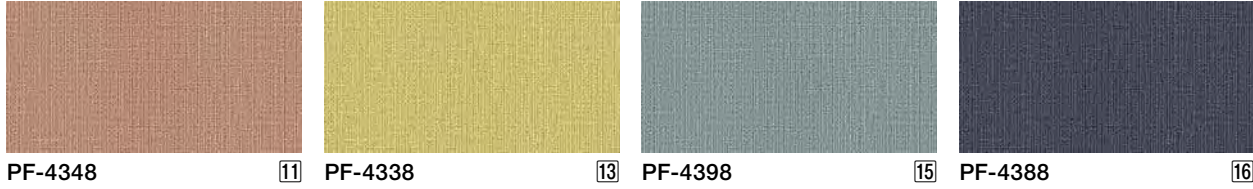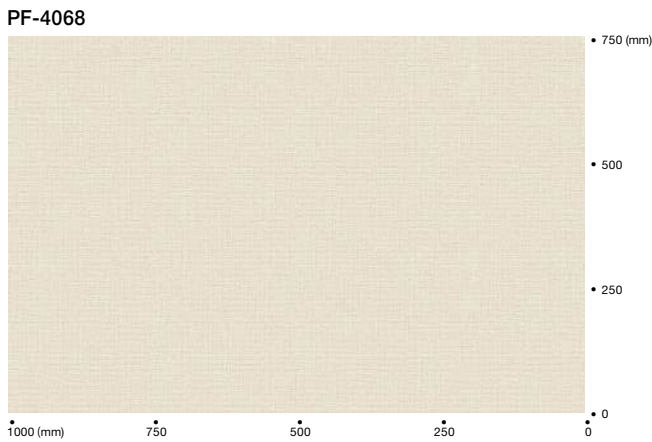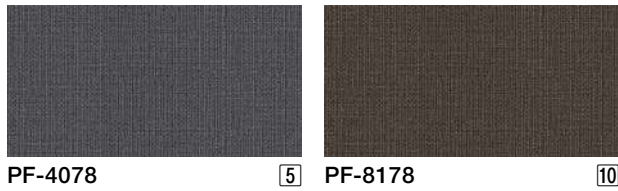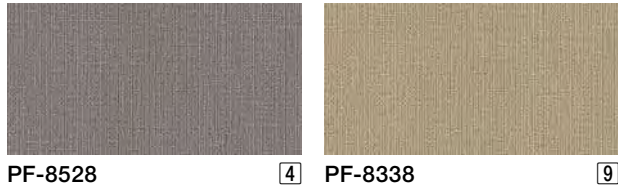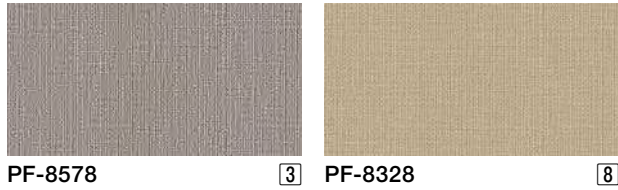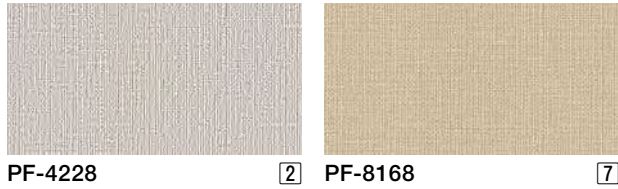

Product Color Numbers

PF-4068	1	4368	14	8168	7	8578	3
4078	5	4388	16	8178	10		
4228	2	4398	15	8328	8		
4338	13	5068	6	8338	9		
4348	11	5338	12	8528	4		

PERMALEUM PIETRA

NO WAX+

Large abstract stone pattern for various scene

floor
score

JIS
TC0308167
JIS A 5705

Recycled Vinyl

Factory-based
Recycling

Low VOCs

No Wax

Heavy Foot
Traffic

Antibacterial

Thickness 2.0mm

Price (material price)	3,300 JPY/m ² 6,006 JPY/m
Material Classification	Multilayer Sheet Vinyl Flooring FS
Dimensions	2.0mm (thickness) × 1,820mm (width) × 9m (length)
Packing	9m/roll
Weight	53.8kg/roll

Build-to-Order

Thickness 2.5mm

Dimensions	2.5mm (thickness) × 1,820mm (width) × 9m (length)
Minimum Order Quantity	100m per color
Production lead time	Three weeks
Price	3,600 JPY/m ² (material price)
	6,552 JPY/m (material price)
Packing	9m/roll
Weight	64.2kg/roll




Installation Method	Subfloor	Adhesive
Basic Installation	Cement Mortar Concrete	Cement FK
Water resistant Installation		Cement U/ Cement EP20


Notes

- Please weld the seams together with designated welding rod.
- Please connect both ends of the sheets together when performing connecting work.
- Adhesive for water resistant installation is recommended in case it is assumed to carry heavy things on the floor.
- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Normal flooring wax will diminish antibacterial performance. Please use an Antibacterial type wax.

Sheet Size/Cross Section



Product Color Numbers	
PX-4079	8529
4229	8579
8499	8659



PX-4229



PX-8659



PX-8579




PX-8499



PX-8529



PX-4079

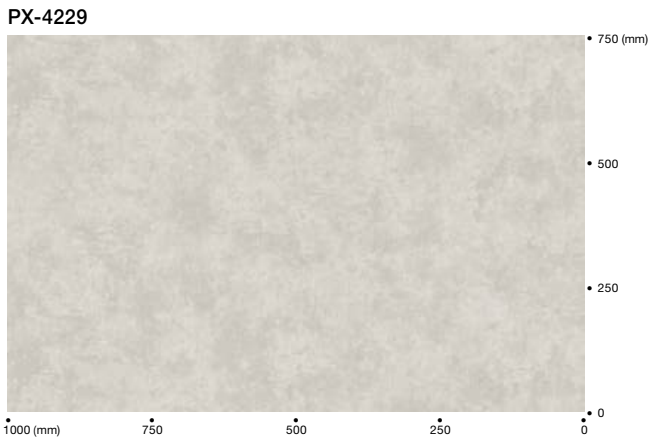

PX-4079

Product Color Numbers	
PT-102M	108M
103M	110M
105M	111M
106M	113M
107M	



PT-102M



PT-103M




PT-105M



PT-110M



PT-113M



PT-107M



PT-106M



PT-111M



PT-108M



PT-113M

NO WAX+

PERMALEUM STREET

Embossed Sheet Vinyl Flooring with abstract wood design

floor
score

JIS
TC0308167
JIS A 5705

Recycled Vinyl

Factory-based
Recycling

Low VOCs

No Wax

Heavy Foot
Traffic

Antibacterial

Thickness 2.0mm

Price (material price)	3,500 JPY/m ² 6,370 JPY/m
Material Classification	Multilayer Sheet Vinyl Flooring FS
Dimensions	2.0mm (thickness) × 1,820mm (width) × 9m (length)
Packing	9m/roll
Weight	49.9kg/roll

Build-to-Order

Thickness 2.5mm

Dimensions	2.5mm (thickness) × 1,820mm (width) × 9m (length)
Minimum Order Quantity	100m per color
Production lead time	Three weeks
Price	3,800 JPY/m ² (material price)
	6,916 JPY/m (material price)
Packing	9m/roll
Weight	65.6kg




Installation Method	Subfloor	Adhesive
Basic Installation	Cement Mortar Concrete	Cement FK
Water resistant Installation		Cement U/ Cement EP20

Notes

- Please weld the seams together with designated welding rod.
- Please connect both ends of the sheets together when performing connecting work.
- Adhesive for water resistant installation is recommended in case it is assumed to carry heavy things on the floor.
- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Normal flooring wax will diminish antibacterial performance. Please use an Antibacterial type wax.

Sheet Size/Cross Section



PERMALEUM EM

NO WAX+

Remaining an outstanding level of performance, our low cost all-purpose sheet has improved as a no wax maintenance product

floor
score

TC0308167
JIS A 5705

JIS

TC0308167
JIS A 5705

環境
配慮型
素材

環境
配慮型
素材

Made with
Recycled Vinyl

Low VOCs

No Wax

Heavy Foot
Traffic

Factory-based
Recycling

Antibacterial

Thickness 2.0mm

Price (material price)	2,850 JPY/m ² 5,187 JPY/m
Material Classification	Multilayer Sheet Vinyl Flooring FS
Dimensions	2.0mm (thickness) × 1,820mm (width) × 9m (length)
Packing	9m/roll
Weight	52.4kg/roll

Thickness 2.5mm

Price (material price)	3,150 JPY/m ² 5,733 JPY/m
Material Classification	Multilayer Sheet Vinyl Flooring FS
Dimensions	2.5mm (thickness) × 1,820mm (width) × 9m (length)
Packing	9m/roll
Weight	62.9kg/roll

Build-to-Order Thickness 2.5mm

Dimensions	2.5mm (thickness) × 1,820mm (width) × 9m (length)
Minimum Order Quantity	100m per color
Production lead time	Three weeks
Price	3,150 JPY/m ² (material price) 5,733 JPY/m (material price)
Packing	9m/roll
Weight	62.9kg/roll

Installation Method	Subfloor	Adhesive
Basic Installation	Cement Mortar Concrete	Cement FK
Water resistant Installation		Cement U/ Cement EP20

Notes

- Please weld the seams together with designated welding rod.
- Please connect both ends of the sheets together when performing connecting work.
- Adhesive for water resistant installation is recommended in case it is assumed to carry heavy things on the floor.
- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Normal flooring wax will diminish antibacterial performance. Please use an Antibacterial type wax.

Sheet Size/Cross Section

Sheet Size

Cross Section

Diagram showing sheet size (9m x 1,820mm) and cross-section layers: Special Antibacterial UV Coating, Color Surface Layer, Underlayer, and Cheesecloth. Dimensions 2.0mm and 2.5mm are indicated for the cross-section.

Plain

8450M

1

8160M

9

8930M

2.5mm Build-to-Order 2

8300M

2.5mm Build-to-Order 10

8650M

2.5mm Build-to-Order 3

8190M

2.5mm Build-to-Order 11

8490M

4

8200M

2.5mm Build-to-Order 12

8320M

5

8210M

2.5mm Build-to-Order 13

8330M

6

8240M

2.5mm Build-to-Order 14

8020M

7

8170M

2.5mm Build-to-Order 8

4070M, PM-116M

Product Color Numbers [Plain]				Product Color Numbers [Neutral]		Product Color Numbers [Vivid]	
8020M 7	8190M 11	8290M 18	8490M 4	4060M 19	8520M 22	4130M 26	4270M 29
8030M 16	8200M 12	8300M 10	8650M 3	4070M 23	8570M 21	4160M 28	4280M 30
8160M 9	8210M 13	8320M 5	8930M 2			4240M 33	4290M 31
8170M 8	8240M 14	8330M 6				4250M 34	4300M 32
8180M 15	8280M 17	8450M 1				4260M 27	

Neutral

8180M

2.5mm Build-to-Order 15

4060M

19

8030M

2.5mm Build-to-Order 16

4220M

2.5mm Build-to-Order 20

8280M

2.5mm Build-to-Order 17

8570M

21

8290M

2.5mm Build-to-Order 18

8520M

22

4070M

23

4280M

2.5mm Build-to-Order 30

4230M

2.5mm Build-to-Order 24

4290M

2.5mm Build-to-Order 31

4080M

2.5mm Build-to-Order 25

4300M

2.5mm Build-to-Order 32

4240M

2.5mm Build-to-Order 33

4250M

2.5mm Build-to-Order 34

Products with thickness of 2.0mm: Available in all colors
Products with thickness of 2.5mm: Available in 10 Standard Colors (4060M/4070M/8020M/8160M/8320M/8330M/8450M/8490M/8520M/8570M)
* Products with thickness of 2.5mm: Also available in 24 Build-to-Order Colors (those marked "2.5mm Build-to-Order ")

140

NEW

Sheet Vinyl Flooring/Linoleum Products without Foam Layer

141

PERMALEUM MARBLE EM

NO WAX

Original marble pattern sheet has improved as no-wax maintenance product

floor
score

TC0308167
JIS A 5705

JIS

TC0308167
JIS A 5705

環境
配慮
マーク

MA

Made with
Recycled Vinyl

Low VOCs

Factory-based
Recycling

No Wax

Heavy Foot
Traffic

Antibacterial

Thickness 2.0mm

Price (material price)	2,950 JPY/m ² 5,369 JPY/m
Material Classification	Multilayer Sheet Vinyl Flooring FS
Dimensions	2.0mm (thickness) × 1,820mm (width) × 9m (length)
Packing	9m/roll
Weight	51.7kg/roll

Thickness 2.5mm

Price (material price)	3,250 JPY/m ² 5,915 JPY/m
Material Classification	Multilayer Sheet Vinyl Flooring FS
Dimensions	2.5mm (thickness) × 1,820mm (width) × 9m (length)
Packing	9m/roll
Weight	63.1kg/roll

Build-to-Order Thickness 2.5mm

Dimensions	2.5mm (thickness) × 1,820mm (width) × 9m (length)
Minimum Order Quantity	100m per color
Production lead time	Three weeks
Price	3,250 JPY/m ² (material price) 5,915 JPY/m (material price)
Packing	9m/roll
Weight	63.1kg/roll



Installation Method	Subfloor	Adhesive
Basic Installation	Cement Mortar Concrete	Cement FK
Water resistant Installation	Cement Mortar Concrete	Cement U/ Cement EP20


Notes

- Please weld the seams together with designated welding rod.
- Please connect both ends of the sheets together when performing connecting work.
- Adhesive for water resistant installation is recommended in case it is assumed to carry heavy things on the floor.
- Page 292-295 Adhesive instruction shows which adhesive is recommendable for each environment and conditions.
- Normal flooring wax will diminish antibacterial performance. Please use an Antibacterial type wax.



PM-133M

1



PM-105M 2.5mm Build-to-Order

8



PM-127M

2



PM-115M

9



PM-107M

3



PM-116M

10



PM-120M 2.5mm Build-to-Order

4



PM-117M 2.5mm Build-to-Order

11



PM-134M 2.5mm Build-to-Order

5



PM-135M 2.5mm Build-to-Order

12



PM-121M 2.5mm Build-to-Order

6



PM-136M 2.5mm Build-to-Order

13



PM-122M 2.5mm Build-to-Order

7




PM-137M 2.5mm Build-to-Order



14

Sheet Size/Cross Section

Sheet Size



Cross Section



PM-130M

15



PM-101M

16



PM-102M

17




PM-131M

18



PM-132M

19



PM-123M 2.5mm Build-to-Order

20



PM-124M 2.5mm Build-to-Order

21

Products with thickness of 2.0mm: Available in all colors
Products with thickness of 2.5mm: Available in 10 Standard Colors (PM-101M/102M/107M/115M/116M/127M/130M/131M/132M/133M)
* Products with thickness of 2.5mm: Available in 11 Build-to-Order Colors (those marked "2.5mm Build-to-Order")

Product Color Numbers

PM-101M	16	116M	10	123M	20	132M	19	137M	14
102M	17	117M	11	124M	21	133M	1		
105M	8	120M	4	127M	2	134M	5		
107M	3	121M	6	130M	15	135M	12		
115M	9	122M	7	131M	18	136M	13		



PM-107M



PM-132M